



TUERCA UNION , Roscado / SW

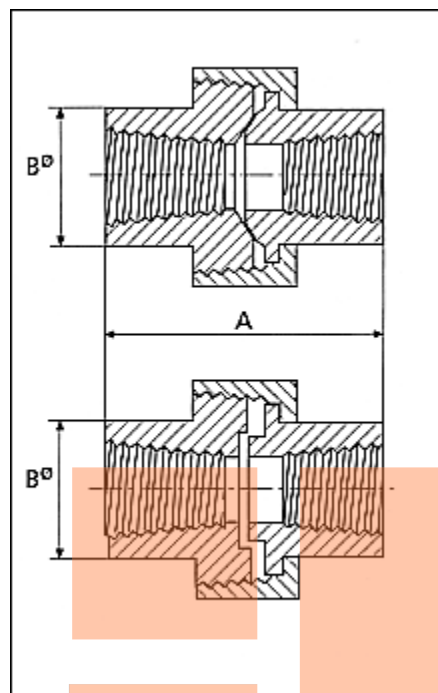

		ROSCADO THREADED							
		1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2
3000 Lb	A/mm	45	45	51	57	64	71	79	90
	B oct/mm	26*	26*	30	36,5	44,6	55*	60,5	73,6
	Peso	14	20	35	42,5	65	97,5	125,5	201

*B ∅/mm.

TUERCA UNION , Roscado / SW

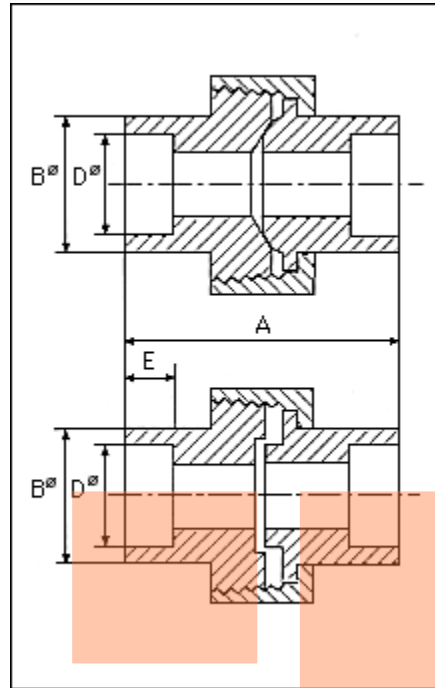

		S. W. - ENCHUFE Y SOLDADURA							
		1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2
3000 Lb.	A/mm	45	45	47,5	57	64	71	79	90
	B oct/mm	26*	26*	30,7*	36,5	44,6	55*	60,5	73,6
	DØ/mm	17,5	17,5	21,7	27,4	34,1	42,6	49	61,1
	E/mm	11	11	13	14,5	16	17,5	19	22,2
	Peso ~Kg%	22,5	34	39	48	66	115	142	245

*B Ø/mm.



Valvulas Industriales de Toluca S.A. de C.V.

Av. Emiliano Zapata, Esquina Altamiranos S/N,
 Col. Emiliano Zapata, C.P. 52000,
 Lerma Estado de México, Tel. (728) 284 7200
 Fax (728) 282 2226 Nextel Ventas 52*107-42*76
vitventas@vitsa.com.mx
www.vitsa.com.mx